


Large Commercial and Industrial



40m viewing distance large format exits

DIMENSIONS (mm)

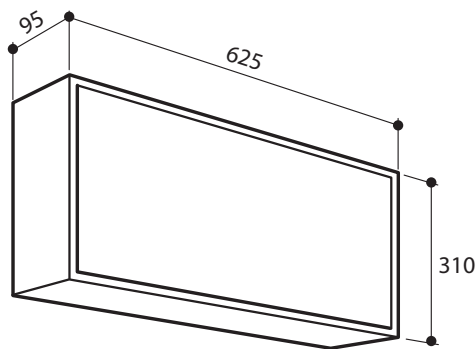

- Jumbo exit for up to 40m viewing distances.
- High integrity 70°C Nickel Cadmium Dual-rate Charge battery pack.
- Large terminal block and cable entry hole minimise installation fuss.
- White powdercoated steel body.
- 18w T8 fluorescent lamp.
- Ultra long life lamp option available on request.
- Electronic ballast options available on request.
- IP rated large format exits also available- please contact Clevertronics for more information.
- Single point, Clever-test® DALI compatible or Zoneworks® computerised testing options available.

When size does matter...

The standard Jumbo exit is suitable for viewing distances up to 40 metres and is available in both wall and ceiling mounting options.

Switchmode electronics and a dual-rate charge, high temperature Nickel Cadmium battery combination ensure maximum reliability. And options are available for further energy and maintenance savings with electronic ballast and ultra long life lamp upgrades.

After installation, compliance testing has never been easier with Clever-test® and Zoneworks® computerised options available across the range. Why waste your valuable time scheduling, performing and then recording emergency lighting discharge tests when the emergency lights can do it themselves?

For more options available please contact Clevertronics.

Jumbo Exits

Specifications

CATALOGUE NUMBERS AND DESCRIPTIONS

Please see Clevertronics website for IES files and latest information.

JUMBO EXITS	TESTING OPTIONS			
	Standard	Clever-test	DALI Em	Zoneworks
Wall	PJE18M-WM-R	DJE18M-WM-R	ZJE18M-WM-R-DALI	ZJE18M-WM-R
Ceiling Single	PJE18M-CM-SS-R	DJE18M-CM-SS-R	ZJE18M-CM-SS-R-DALI	ZJE18M-CM-SS-R
Ceiling Double	PJE18M-CM-DS-R	DJE18M-CM-DS-R	ZJE18M-CM-DS-R-DALI	ZJE18M-CM-DS-R

For directional options please add L or R to above code for Left or Right eg: ZJE18M-WM-R-L.

"EXIT" legends to match existing installations are still available- please contact us if required.

Description:


40m viewing 18w Jumbo exit, dual-rate charge high temp Ni-Cad battery, wall or ceiling, single and double-sided and directional options as indicated. (Clever-test/ DALI Em/ Zoneworks compatible)

Clevertronics Jumbo Exit. AS2293 Classification Co=D5 C90=A5

SPACING TABLE	MOUNTING HEIGHTS			
	Classification	2.1m	2.4m	2.7m
D5	7.8	8	8.1	8.2
A5	4.2	4.4	4.6	4.8

*Maximum allowed mounting height is 2.7m but for exceptions see AS2293.1 2005

DIMENSIONS (mm)

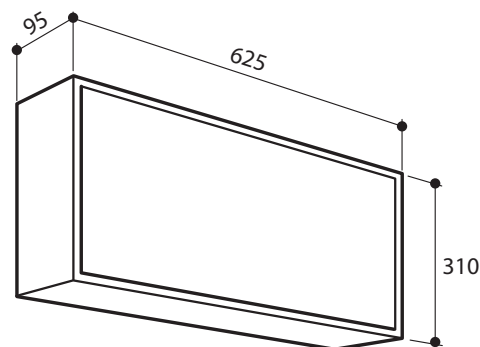

OTHER JUMBO SIZED EXITS:

IP rated large format exits also available- please contact Clevertronics for more information.

Please check our website for your closest Clevertronics office and local representative.

www.clevertronics.com.au

Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.