

Powerful Emergency Lighting



Now
With Improved
D32 Light
Output


- 3W LED delivering superior light output
- Tamper resistant and no dome required
- 2.5W Ultra-low energy consumption
- 60% smaller battery size to conventional quartz halogen fitting
- Lifetime lamp warranty
- Available as Premium, Clever-test and Zoneworks

The LIFELIGHT™ delivers low cost, low maintenance, high performance emergency lighting solutions. Achieve higher levels of compliance, cheaper and easier, by using the LIFELIGHT™. Its slim profile lamp head offers aesthetic appeal and suits most applications, while the additional expansion plate allows access in fixed ceilings.

Lifelight Emergency

Specifications


DIMENSIONS

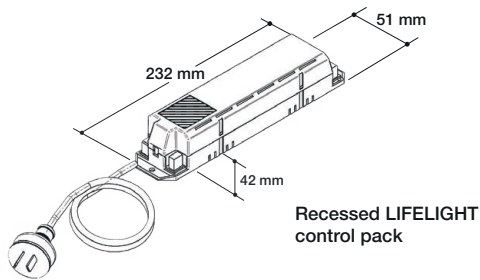

Recessed LIFELIGHT control pack

Minimum Ceiling capacity height:
Small lamphead 180mm
Large lamphead 80mm

BATTERY PACK

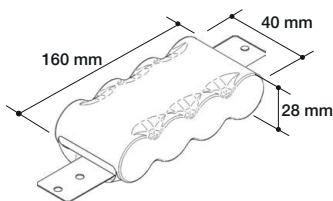

STANDARD LAMP HEAD
95mm DIAMETER
85mm CUT OUT



LIFELIGHT WITH ADAPTER PLATE.
140mm DIAMETER



OPTIONAL BLACK LAMP HEAD.

ORDERING INFORMATION

Detailed specification details available for download from Clevertronics website

LIFELIGHT RANGE	TESTING OPTIONS			PHOTOMETRICS	
Description	Standard	Clever-test [®]	Zoneworks [®]	C0	C90
PREMIUM RANGE, all come with high temperature Nickel Cadmium batteries as standard					
Recessed	PLIFE	DLIFE	ZLIFE	D32	D32
Surface mount, square	PLIFE-SMS	DLIFE-SMS	ZLIFE-SMS	D32	D32
Recessed, black	PLIFE-BLK	DLIFE-BLK	ZLIFE-BLK	D32	D32

SPACING TABLE

Detailed specification details available for download from Clevertronics website

MOUNTING HEIGHTS									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	6.0m	8.0m
D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	20.2	20.7


PRODUCT INFORMATION

Charging Method	Dual rate Charge
Lamp	1 x 3W LED
Battery	P/N: 1510420, 4 x Sub C, High Temp NiCd
Inverter board	P/N: 8002150, PCA Zoneworks plug-in compatible
Ceiling hole cut out	85mm
Power Consumption	2.5W

Please check our website for your closest Clevertronics office and local representative

www.clevertronics.com.au

Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.



Clevertronics[®]
Emergency lighting innovation